


0.6/1 kV XLPE/LSHF (3 CORES) LOW SMOKE & HALOGEN FREE CABLES

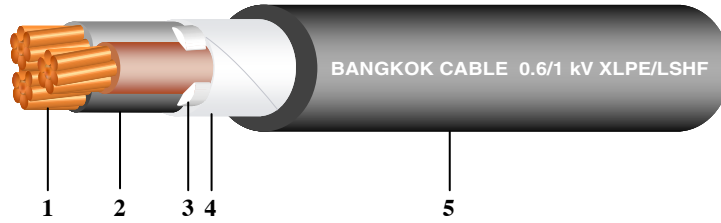

Standards Achieved :

Construction	: IEC 60228, IEC 60502-1
Flame propagation	: IEC 60332-1-2
	: IEC 60332-3-24 Category C
Acid gas emission	: IEC 60754-1
	: IEC 60754-2
Smoke emission	: IEC 61034-2

Construction :

1. Conductor	: Concentric stranded or Compacted stranded copper wires
2. Insulation	: Cross-linked polyethylene (XLPE) Brown, Black, Grey colour or requested colour
3. Filler	: LSHF rod and/or FR-filler yarn
4. Binding tape	: Polyester tape
5. Sheath	: Low smoke & halogen free compound (LSHF), Black colour, or requested colour

Classification :

Maximum conductor temperature	: 90°C
Maximum circuit voltage	: 1,000 V
AC test voltage	: 3,500 V

Application :

Preferably used for installation into conduit and surface wiring which provide flame retardant, low smoke & corrosive gases properties in case of fire.

No. of core	Conductor			Thickness of insulation mm (Nominal)	Thickness of sheath mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20°C Ω/km (Max.)	Current rating in free air at 40°C ambient A	Cable weight kg/km (Approx.)	Standard length m
	Cross-sectional area mm ²	No. of wires (Min.)	Diameter mm (Approx.)							
3	1.5	7	1.53	0.7	1.8	11.5	12.1	21	140	500
3	2.5	7	1.98	0.7	1.8	12.0	7.41	29	190	500
3	4	7	2.49	0.7	1.8	13.5	4.61	38	250	500
3	6	7	3.09	0.7	1.8	14.5	3.08	49	330	500
3	10	6	3.72	0.7	1.8	16.0	1.83	68	470	500
3	16	6	4.69	0.7	1.8	18.0	1.15	91	670	500
3	25	6	5.90	0.9	1.8	21.5	0.727	116	1,020	500
3	35	6	6.95	0.9	1.8	24.0	0.524	144	1,350	500
3	50	6	8.33	1.0	1.8	27.5	0.387	180	1,800	500
3	70	12	9.73	1.1	1.9	31.5	0.268	224	2,500	500
3	95	15	11.43	1.1	2.0	35.5	0.193	271	3,370	500
3	120	18	12.95	1.2	2.1	39.5	0.153	315	4,220	500
3	150	18	14.27	1.4	2.2	43.5	0.124	363	5,190	400
3	185	30	15.98	1.6	2.4	48.5	0.0991	415	6,490	400
3	240	34	18.47	1.7	2.6	55.0	0.0754	490	8,440	300
3	300	34	20.68	1.8	2.7	60.5	0.0601	565	10,470	250
3	400	53	23.39	2.0	3.0	68.0	0.0470	678	13,350	200