


PVC Self - Supported Telephone Dropwire (DW)

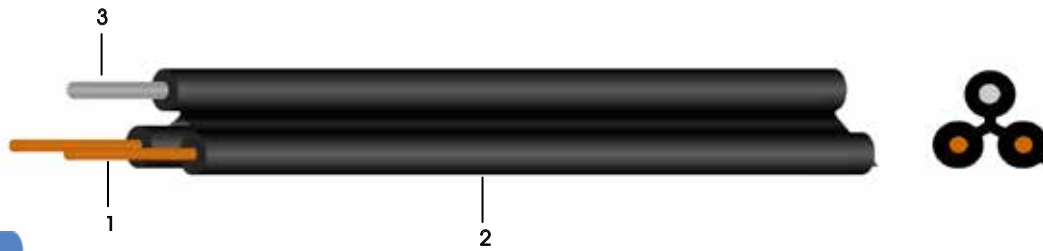

Construction

- 1. Conductor annealed : Plain annealed copper , solid
- 2. Insulation : Polyvinyl chloride (Black)
- 3. Support wire : Galvanized steel wire

Reference Standard

TOT Spec. No.OES - 004 - 040 - 01

Marking

BANGKOK CABLE ☆☆☆☆ S-S DROP WIRE ** × 2 C

Application

This wire is designed for extending distribution cable pair from a pole or cable terminal to telephone protector.

Conductor diameter	Number of cores	Thickness of insulation	Diameter of support wire	Overall diameter	Cable weight	Standard length
mm (Approx.)	C	mm (Nominal)	mm (Nominal)	mm (Approx.)	kg/km (Approx.)	m/coil
0.65	2	1.1	1.20	6.1 ~ 7.3	45	200
0.9	2	1.1	1.20	6.8 ~ 8.1	53	200

Note :

- 1. BCC Specification No. : TEA 004/0208
- 2. ☆☆☆☆ : Year of manufacture
- 3. ** : Diameter of conductor