


Heat - Resistant Lead Free PVC Insulated Flat Cord (HVFF-LF)

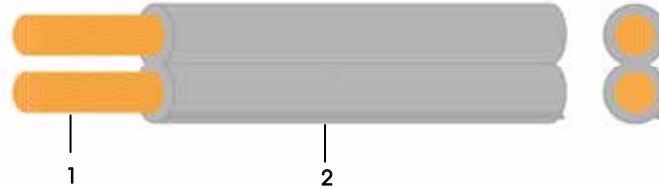

Construction

1. Conductor : Annealed copper wire (A)
2. Insulation : Heat-resistant lead free PVC

Reference Standard

JIS C 3306

Classification

75 °C, 300V

Marking

<PS>E JET BANGKOK CABLE HOSODA タイネツ HVFF *.* mm² LF

Application

Intended for use in small electric appliance of a.c. 300V or under principally for indoor services.

Cross-sectional area mm ²	Conductor		Thickness of insulation mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20 °C Ω/km (Max.)	Cable weight kg/km (Approx.)	Standard length m/coil
	No. & dia. of wire No./mm	Diameter mm (Approx.)					
0.5	20/0.18	0.93	0.8	2.5 x 5.0	36.7	22	100
0.75	30/0.18	1.14	0.8	2.7 x 5.4	24.4	28	100
1.25	50/0.18	1.47	0.8	3.1 x 6.2	14.7	40	100
2.0	37/0.26	1.83	0.8	3.4 x 6.8	9.5	55	100

Note

1. BCC specification No. : ELA 015/0108
2. *.* : Size of conductor
3. DENAN approval No. : JET 6133-12011-1002