


Nonmigration Heat - Resistant Lead Free PVC Insulated Single Core Cord (NMI-HVSF-LF)

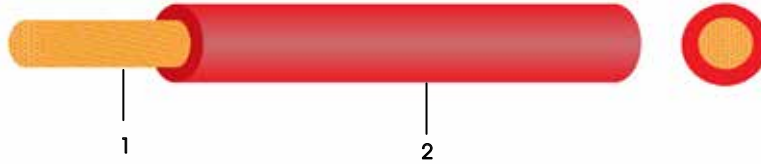

Construction

- 1. Conductor : Annealed copper wire (A)
- 2. Insulation : Nonmigration heat-resistant lead free PVC

Reference Standard

JIS C 3306

Classification

-30~90 °C, 300V

Marking

<PS>E JET BANGKOK CABLE HOSODA タイネット NMI-HVSF
 ＊ ＊ mm² LF

Application

Intended for use in small electric appliance of a.c. 300V or under principally for indoor services.

Cross-sectional area mm ²	Conductor		Thickness of insulation mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20 °C Ω/km (Max.)	Cable weight kg/km (Approx.)	Standard length m/coil
	No. & dia. of wire No./mm	Diameter mm (Approx.)					
0.5	20/0.18	0.93	0.8	2.53	36.7	11	450
0.75	30/0.18	1.14	0.8	2.74	24.4	14	450
1.25	50/0.18	1.47	0.8	3.07	14.7	20	300
2.0	37/0.26	1.83	0.8	3.43	9.5	27	300
3.5	45/0.32	2.48	0.8	4.08	5.1	45	300

Note

1. BCC specification No. : ELA 037/0308
2. ＊ ＊ : Size of conductor
3. DENAN approval No. : JET 6133-12005-1002