


300/300 V 70°C 60227 IEC 43

SINGLE-CORE CORD FOR INDOOR DECORATIVE LIGHTING CHAINS

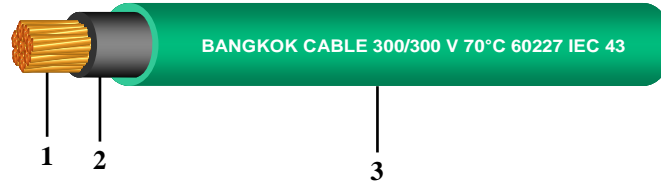

Construction

1. Conductor : Bunch stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC), Black or other colour
(inner layer)
3. Insulation : Polyvinyl chloride (PVC), Green colour
(outer layer)

Reference Standard :

TIS 11 Part 5-2553



Classification

- Maximum conductor temperature : 70°C
- Rated voltage : 300/300 V
- AC test voltage : 2,000 V

Application

- Use for connecting indoor decorative lighting

Products code	No. of core	Conductor			Thickness of each layer of insulation mm (Min.)	Overall insulation thickness		Overall diameter		Insulation resistance at 70°C MΩ.km (Min.)	Cable weight kg/km (Approx.)	Standard length m
		Cross-sectional area mm ²	Dia. of wires (Max.)	Diameter mm (Approx.)		(Min.) mm	(Avg.) mm	Lower limit mm	Upper limit mm			
C2LF01094042	1	0.5	0.21	0.92	0.2	0.6	0.7	2.3	2.7	0.014	11	100/C
C2LF01164042	1	0.75	0.21	1.13	0.2	0.6	0.7	2.4	2.9	0.012	14	100/C

C = Packing in coil