


# 300/300 V 70°C 60227 IEC 52

2 CORES - LIGHT POLYVINYL CHLORIDE SHEATHED CORD WITH GROUND

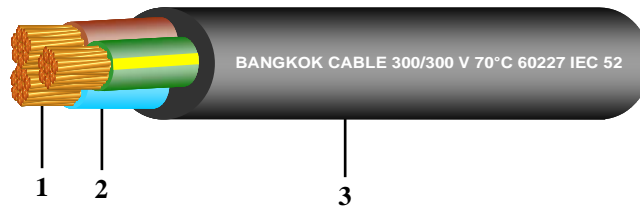

## Construction

- 1. Conductor : Bunch stranded annealed copper
- 2. Insulation : Polyvinyl chloride (PVC)  
Colour code : Green/Yellow, Light Blue, Brown
- 3. Sheath : Polyvinyl chloride (PVC), Black colour

## Reference Standard :

TIS 11 Part 5-2553



## Classification

- Maximum conductor temperature : 70°C
- Rated voltage : 300/300 V
- AC test voltage : 2,000 V

## Application

- Use for connecting portable electric appliance
- Use for wiring within electric appliance

Products code	No. of core	Conductor				Thickness of insulation	Thickness of sheath	Overall diameter		Insulation resistance at 70°C	Current rating in free air	Cable weight	Standard length
		Cross-sectional area		Dia. of wires	Diameter			Lower limit	Upper limit				
		mm <sup>2</sup>	mm <sup>2</sup>										
C2LG02724012	2	0.5	0.5	0.21	0.92	0.5	0.6	4.9	6.3	0.012	3	48	100/C
C2LG029J4012	2	0.75	0.75	0.21	1.13	0.5	0.6	5.2	6.7	0.010	6	60	100/C

C = Packing in coil

