


300/300 V 90°C 60227 IEC 56

2 CORES - HEAT-RESISTANT LIGHT PVC-SHEATHED CORD WITH GROUND

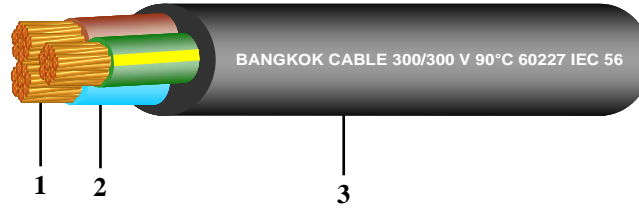

Construction

1. Conductor : Bunch stranded annealed copper
2. Insulation : Polyvinyl chloride (PVC)
Colour code : Green/Yellow, Light Blue, Brown
3. Sheath : Polyvinyl chloride (PVC), Black colour

Reference Standard :

TIS 11 Part 5-2553



Classification

- Maximum conductor temperature : 90°C
 Rated voltage : 300/300 V
 AC test voltage : 2,000 V

Application

- Use for connecting portable electric appliances (heavy duty)

Products code	No. of core	Conductor				Thickness of insulation	Thickness of sheath	Overall diameter		Insulation resistance at 90°C	Current rating in free air	Cable weight	Standard length
		Cross-sectional area		Dia. of wires	Diameter			Lower limit	Upper limit				
		mm ²	mm ²										
C2LJ02724012	2	0.5	0.5	0.21	0.92	0.5	0.6	4.9	6.3	0.012	3	48	100/C
C2LJ029J4012	2	0.75	0.75	0.21	1.13	0.5	0.6	5.2	6.7	0.010	6	60	100/C

C = Packing in coil