


69 kV CE

1 CORE - CROSSLINKED POLYETHYLENE POWER CABLE

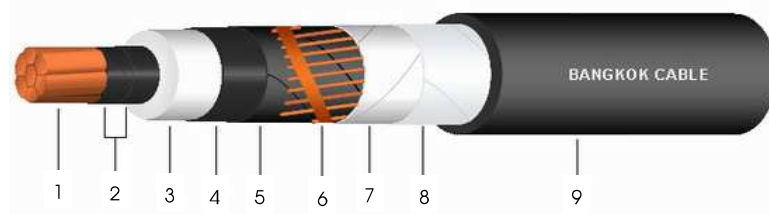

- ### Construction
- 1. Conductor : Circular compact stranded annealed copper
 - 2. Conductor screen : Semi-conductive tape with extruded Semi-conductive cross-linked polyethylene compound
 - 3. Insulation : Cross-linked polyethylene (XLPE) compound
 - 4. Insulation screen : Semi-conductive cross-linked polyethylene compound
 - 5. Water blocking tape : Semi-conductive water blocking tape
 - 6. Metallic screen : Copper wires with copper contact tape
 - 7. Water blocking and Cushioning tape : Non-conductive water blocking tape
 - 8. Radial water barrier : Copolymer aluminium tape
 - 9. Sheath : Black Polyethylene (PE) , (Optional : with RIB)

Reference Standard

IEC 60840
TIS 2202

Classification

Maximum conductor temperature : 90°C
Maximum circuit voltage : 72.5 kV
AC test voltage : 90 kV

Application

Preferably laid in substations, factories and urban area. The cable shall be suitable for use in ducts, trays and direct burial in ground, subjected to immerse in water all time.

Conductor			Thickness of conductor screen	Thickness of insulation	Diameter over insulation	Thickness of insulation screen	Area of metallic screen*	Thickness of sheath	Overall diameter (Excluding Rib)	DC. Conductor resistance at 20°C	Capacitance	Current rating direct burial in ground at 30°C	Cable weight (Excluding Rib)	Standard length
Cross-sectional area	No. of wires	Diameter												
mm ²	(Min.)	mm (Approx.)	mm (Nominal)	mm (Nominal)	mm (Approx.)	mm (Nominal)	mm ²	mm (Nominal)	mm (Approx.)	Ω/km (Max.)	μF/km (Nominal)	A	kg/km (Approx.)	m/drum
400	53	23.39	1.5	11.0	49.2	1.5	120	3.5	68	0,0470	0,222	680	7,280	500
500	53	26.67	1.5	11.0	53.1	1.5	120	3.5	71	0,0366	0,246	775	8,520	500
630	53	30.22	1.5	11.0	56.6	1.5	120	3.5	75	0,0283	0,269	885	10,050	300
800	53	34.00	1.5	11.0	60.4	1.5	120	3.5	79	0,0221	0,292	995	11,900	300

* The area of metallic screen can be designed upon request by not less than 95 mm²