


## 8.7/15(17.5) kV CV (CE optional)\*

3 CORES - CROSSLINKED POLYETHYLENE POWER CABLE

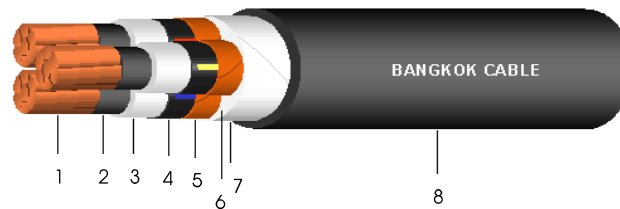

### Construction

1. Conductor : Circular compact stranded annealed copper
2. Conductor screen : Semi-conductive cross-linked polyethylene compound
3. Insulation : Cross-linked polyethylene (XLPE) compound
4. Insulation screen : Semi-conductive cross-linked polyethylene compound
5. Metallic screen : Copper tape
6. Filler : Polypropylene (Non-hygroscopic material)
7. Binding tape : Polyester or Spunbond tape
8. Sheath : Black Polyvinyl chloride (PVC), (Optional : PE)\*

### Reference Standard

IEC 60502-2

### Classification

- Maximum conductor temperature : 90°C  
 Maximum circuit voltage : 17.5 kV  
 AC test voltage : 30.5 kV

### Application

For general purpose power distribution in dry or wet location. Exposed in aerial, direct burial, conduit, open tray and underground duct installation.

Conductor			Thickness of insulation mm (Nominal)	Diameter over insulation mm (Approx.)	Thickness of sheath mm (Nominal)	Overall diameter mm (Approx.)	DC. Conductor resistance at 20°C Ω/km (Max.)	Insulation resistance at 20°C MΩ.km (Min.)	Current rating		Cable weight kg/km (Approx.)	Standard length m/drum
Cross-sectional area mm <sup>2</sup>	No. of wires (Min.)	Diameter mm (Approx.)							in free air at 40°C ambient A	direct burial in ground at 30°C A		
25	6	5.90	4.5	16.4	2.4	46	0.727	3,350	145	145	2,420	500
35	6	6.95	4.5	17.5	2.5	49	0.524	3,050	175	175	2,860	500
50	6	8.33	4.5	18.8	2.6	52	0.387	2,730	210	205	3,420	500
70	12	9.73	4.5	20.2	2.7	56	0.268	2,470	265	250	4,210	500
95	15	11.43	4.5	21.9	2.8	60	0.193	2,210	320	300	5,220	300
120	18	12.95	4.5	23.5	2.9	63	0.153	2,020	370	340	6,170	300
150	18	14.27	4.5	24.8	3.0	66	0.124	1,890	420	385	7,170	300
185	30	15.98	4.5	26.5	3.1	70	0.0991	1,730	480	435	8,510	250
240	34	18.47	4.5	29.0	3.3	76	0.0754	1,550	570	505	10,590	200
300	34	20.68	4.5	31.2	3.4	82	0.0601	1,420	655	570	12,710	150
400	53	23.39	4.5	33.9	3.7	88	0.0470	1,290	755	650	15,660	150