


Unshielded Twisted Pair Dropwire (2 Pairs)

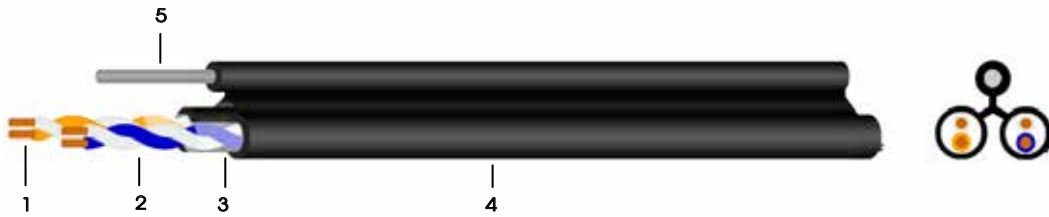

Construction

- 1. Conductor : Plain annealed copper , solid
- 2. Insulation : Polyethylene
- 3. Core – covering : Non - hygroscopic tape
- 4. Sheath : Polyvinyl chloride (Black)
- 5. Support wire : Galvanized steel wire
- Identification : Pair no.1 : White and Blue
: Pair no.2 : White and Orange

Reference Standard

TOT Spec. No. OES - 004 - 041 - 01

Marking

BANGKOK CABLE ☆☆☆☆ UTP DW 0.9 x 2P

Application

For use as aerial distribution service wire

Conductor diameter	Number of pairs	Diameter of support wire	Thickness of sheath	Overall diameter	Cable weight	Standard Length
mm (Nominal)	P	mm (Approx.)	mm (Minimum)	mm (Approx.)	kg/km (Approx.)	m/coil
0.9	2	1.20	1.05	11	120	200

Note :

1. BCC Specification No. : TEA 010/0310
2. ☆☆☆☆ : Year of manufacture