


Heat - Resistant Lead Free PVC Insulated Cabtyre Oval Cord (HVCTFK-LF)

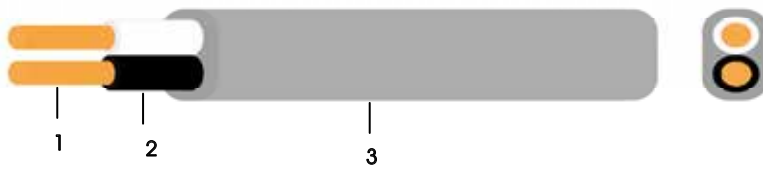

Construction

- 1. Conductor : Annealed copper wire (A)
- 2. Insulation : Heat-resistant lead free PVC
- 3. Sheath : Lead free PVC

Reference Standard

JIS C 3306

Classification

75 °C, 300V

Marking

<PS>E JET BANGKOK CABLE HOSODA タイネツ HVCTFK
 ＊ ＊ mm² LF

Application

Intended for use in small electric appliance of a.c. 300V or under
 principally for indoor services.

Cross-sectional area mm ²	Conductor		Thickness of insulation mm (Nominal)	Thickness of Sheath mm (Nominal)	Overall diameter mm (Approx.)	Conductor resistance at 20 °C Ω/km (Max.)	Cable weight kg/km (Approx.)	Standard length m/coil
	No. & dia. of wire No./mm	Diameter mm (Approx.)						
0.75	30/0.18	1.1	0.6	1.0	4.3 x 6.6	24.4	45	100
1.25	50/0.18	1.5	0.6	1.0	4.7 x 7.4	14.7	55	100
2.0	37/0.26	1.8	0.6	1.0	5.0 x 8.0	9.5	75	100

Note

1. BCC specification No. : ELA 016/0108
2. ＊ ＊ : Size of conductor
3. DENAN approval No. : JET 6133-12009-1002