


# 450/750 V 70°C NYY-G

2 CORES - PVC INSULATED AND DOUBLE SHEATHED CABLE, ROUND TYPE WITH GROUND

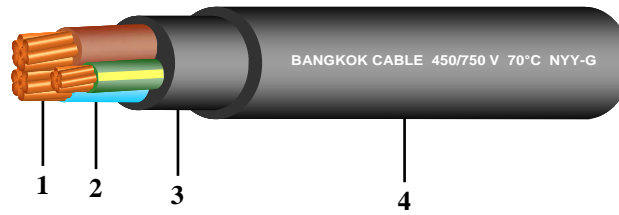

## Construction

- 1. Conductor : Circular stranded annealed copper
- 2. Insulation : Polyvinyl chloride (PVC)  
Colour code : Phase - Light Blue, Brown  
: Ground - Green/Yellow
- 3. Inner sheath : Polyvinyl chloride (PVC), Black colour
- 4. Outer sheath : Polyvinyl chloride (PVC), Black colour

## Reference Standard :

TIS 11 Part 101-2553



## Classification

- Maximum conductor temperature : 70°C
- Rated voltage : 450/750 V
- AC test voltage : 2,500 V

## Application

- Use for general purpose
- laid on cable trays/Cable ladder
- Install in duct in ground or direct burial in ground

Products code	Conductor						Thickness of insulation		Thickness of inner sheath	Thickness of outer sheath	Overall diameter	Insulation resistance at 70°C	Current rating		Cable weight	Standard length
	Cross-sectional area		No. of wire		Diameter		Phase	Ground					on cable ladder	direct burial in ground		
	mm <sup>2</sup>		(Min.)		(Approx.)								MΩ.km	A		
Phase	Ground	Phase	Ground	Phase	Ground	Phase	Ground	(Approx.)	(Approx.)	(Min.)			(Approx.)			
C6M0028X2011	25	16	7	7	6.30	5.01	1.3	1.1	1.2	2.0	28.0	0.0054	88	128	1,280	500/D
C6M0029X2011	35	16	7	7	7.55	5.01	1.3	1.1	1.2	2.0	30.0	0.0047	110	154	1,550	500/D
C6M0020Y2011	50	25	19	7	8.75	6.30	1.5	1.3	1.2	2.2	34.0	0.0046	133	181	2,080	500/D
C6M0021Y2011	70	35	19	7	10.50	7.55	1.5	1.3	1.5	2.2	38.5	0.0039	171	223	2,810	500/D
C6M0022Y2011	95	50	19	19	12.35	8.75	1.7	1.5	1.5	2.2	43.5	0.0038	207	267	3,710	500/D
C6M0023Y2011	120	70	37	19	13.93	10.50	1.7	1.5	1.5	2.4	47.5	0.0034	240	304	4,620	300/D
C6M0024Y2011	150	95	37	19	15.47	12.35	1.9	1.7	1.8	2.6	53.0	0.0034	278	342	5,840	300/D
C6M0025Y2011	185	95	37	19	17.29	12.35	2.1	1.7	1.8	2.8	57.5	0.0034	317	386	6,910	300/D
C6M0026Y2011	240	120	37	37	19.89	13.93	2.3	1.7	2.0	3.0	64.5	0.0033	374	448	8,860	200/D
C6M0027Y2011	300	150	61	37	22.23	15.47	2.5	1.9	2.0	3.2	71.0	0.0032	432	507	10,880	200/D